

REMKO RTH150
Hi-Pressure Trash Pump



REMKO RTH150

Remko RTH Series Pumps are an economical solution to high volume/high head self priming applications. Robust construction with innovative hydraulic design provides the stamina for handling solids laden liquids with ease.

Dependable self priming performance makes the RTH Series Pumps ideally suited for industrial applications including mine dewatering, trade waste, metal and timber mills, road construction, food and chemical processing plants.



The Remko RTH150 Hi-Pressure Trash Pump

PUMP SPECIFICATIONS

SPECIFICATIONS

Maximum outside dimensions. 961mm x 585mm x 902mm (length x width x height)

Weight. 424 kilograms

Impeller diameter. 317.5 millimetres

RPM. From 850 to 1950 RPM

Solids. 31 millimetres maximum

SELF PRIMING SPECIFICATIONS

850 RPM - 2.4 metres. 1150 RPM - 3.0 metres. 1450 RPM - 4.2 metres. 1750 RPM - 4.5 metres


1950 RPM - 4.5 metres.

Confirm NPSH before using Curve.

Note: Specifications may change without notice

PERFORMANCE CURVE

The Performance Curve indicates Total Metres Head vs Flow Rate

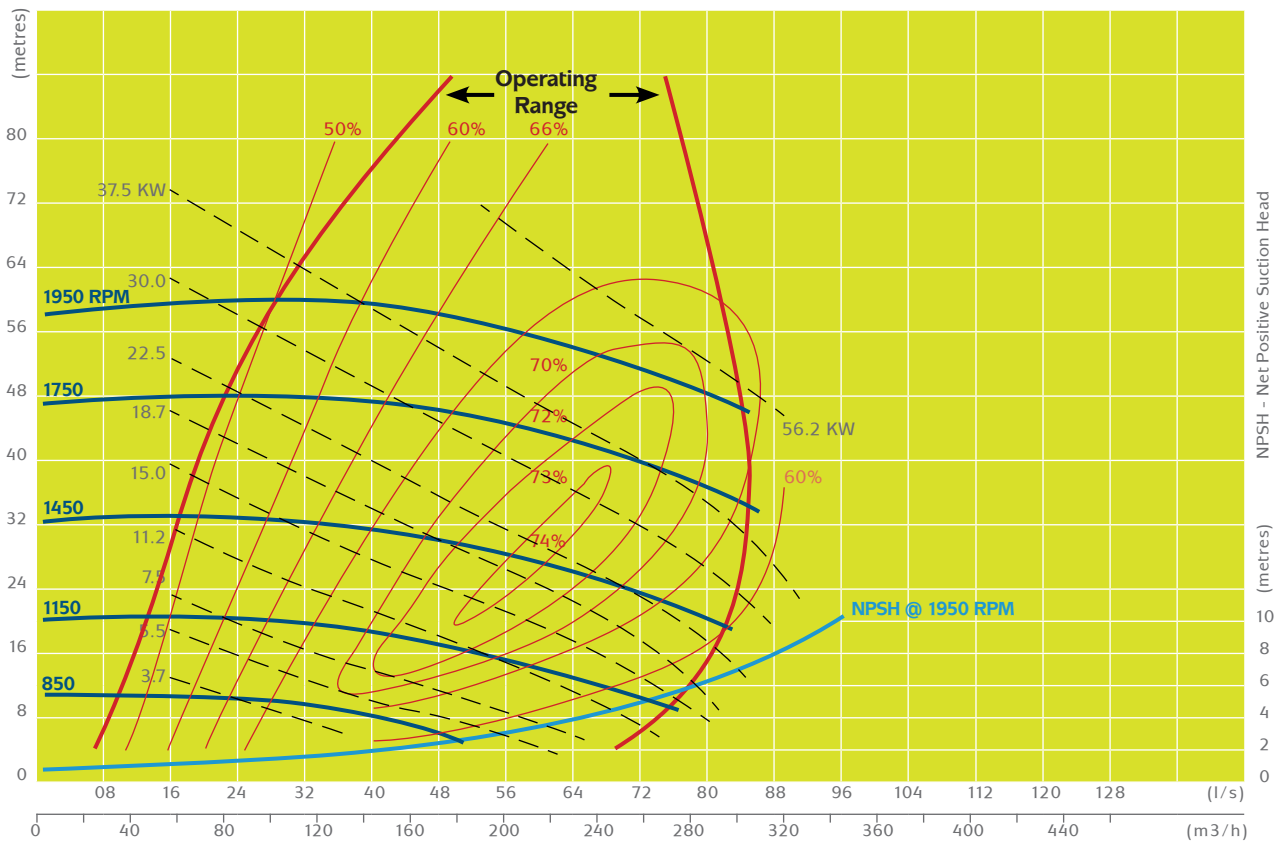

OUTSIDE DIMENSIONS RTH150

150mm ANSI 150

70.0

Pump dimensions may change without notice
All dimensions in millimetres

150mm ANSI 150

Ø 17.5mm

902.0mm

527.0mm

584.2mm

406.4mm

Maintain distance of 480mm to remove the Rotating Assembly

568.3mm

122.5

Ø 44.5

257.2mm


77.8

279.4mm

358.0mm

844.6mm

961.0mm

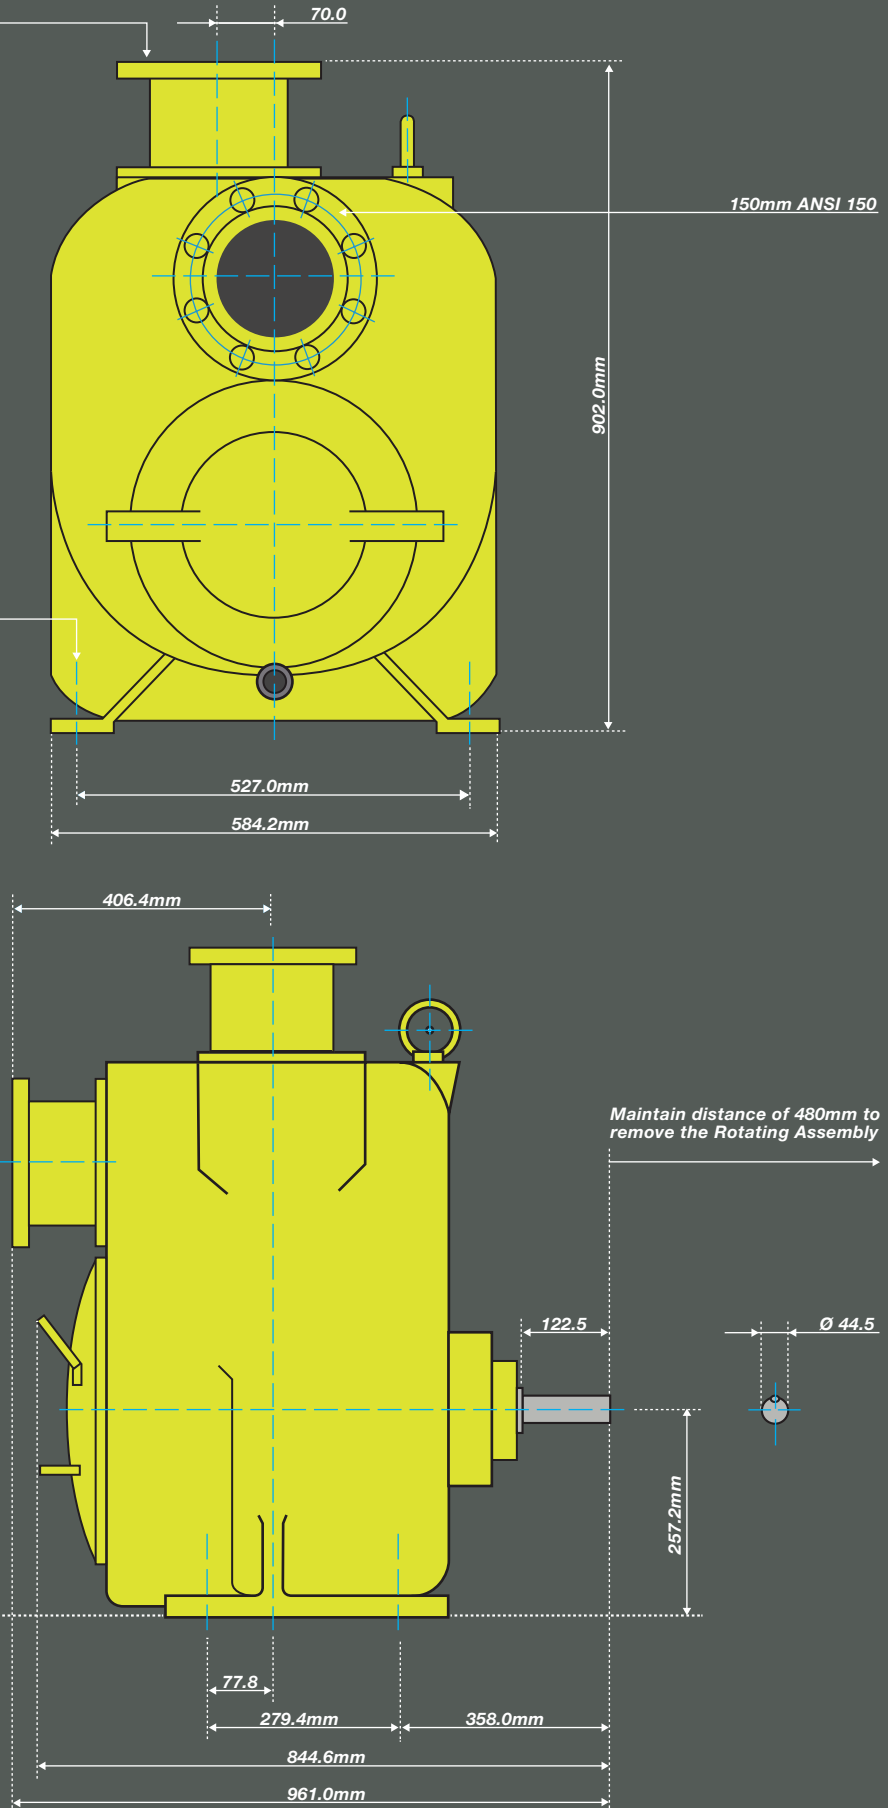

Contact your local Remko Distributor



Netco Pumps & Equipment
1300 301 664
www.netcopumps.com.au